



STRENX 100 XF

General Product Description

The cold-formable steel for light and heavy transportation components and solutions. Strenx 100 XF is a thermomechanically rolled steel, made for cold forming, with a minimum yield strength of 100 ksi. It comes in coils, slit coils and cut-to-length sheets. Thickness measurements in inches can be found in the data sheet. Strenx 100 XF can be supplied in compliance with the requirements of ASTM A1011 or A1018 if agreed upon when you place your order.

Dimension Range

Strenx 100 XF is available in thicknesses of 0.079- 0.393 inches (2-10 mm), and in widths up to 63 inches (1600 mm) as coil, slit coil and as cut to length sheets in lengths up to 630 inches (16000 mm). Strenx 100 XF can be supplied according to ASTM A1011 or A1018 specifications if agreed up on at the time of order.

Mechanical Properties

Thickness (mm)	Yield Strength R_{eH} (min ksi)	Tensile Strength R_m (min ksi)	Elongation A_{50r} , Sheet thickness $t \geq 2\text{mm}$ (min %)	Min. inner bending radius for a 90° bend
2- 3.48	100	110	15	0.8 xt
3.6- 6.0	100	110	15	1.2 xt
6.01- 10	100	110	15	1.6 xt

The mechanical properties are tested in the transverse direction.

If ordered according to ASTM A1011 specification the tensile testing is performed in the longitudinal direction and the guaranteed elongation is A50 min 14 %.

Impact Properties

Minimum energy for test on longitudinal Charpy V 10x10 mm test specimens ¹⁾	Test temperature
20 ft-lbs	-40 °F

¹⁾Impact testing according to EN ISO 148-1 is performed on thicknesses ≥ 0.177 inch (4.5mm). The specified minimum value corresponds to a full-size specimen.

STRENX 100 XF

Chemical Composition (ladle analysis)

C (max %)	Si ¹⁾ (max %)	Mn (max %)	P (max %)	S (max %)	Al (min %)	Nb ²⁾ (max %)	V ²⁾ (max %)	Ti ²⁾ (max %)
0.12	0.21	2.10	0.025	0.010	0.015	0.09	0.20	0.15

¹⁾ If the material is to be hot-dip galvanized, this must be specified at the time of order.

²⁾ Sum of Nb, V and Ti = 0.22% max.

Tolerances

More details are given on www.ssab.com.

Thickness

Tolerances according to Strenx Thickness Guarantees.

Strenx Guarantees offer considerably narrower thickness tolerances compared to EN 10 051.

Length and Width

Width and length tolerances according to SSAB standard.

The SSAB standard offer narrower width and length tolerances compared to EN 10 051.

Length tolerances only apply for cut to length sheets.

Shape

Tolerances according to EN 10 051.

Narrower tolerances according to the SSAB standard are available on request.

Flatness

Tolerances according to Strenx Flatness Guarantees Class A.

Strenx Flatness Guarantees offer narrower tolerances compared to EN 10 051.

Flatness guarantees only apply for cut to length sheets.

Surface Properties

According to EN 10 163-2 Class A, Subclass 3.

Delivery Conditions

Thermomechanically Rolled. Strenx 100 XF is available in as rolled or pickled surface condition with mill or cut edge.

Fabrication and Other Recommendations


Welding, bending and machining

Strenx 100 XF has good welding, cold forming and cutting performance. Strenx 100 XF is a cold forming steel not suited for heat treatments at temperatures above 1080°F (580°C) since the material then may lose its guaranteed properties.

For information concerning fabrication, see SSAB's brochures on www.ssab.com or consult Tech Support, techsupport@ssab.com.

Appropriate health and safety precautions must be taken when bending, welding, cutting, grinding or otherwise working on the product.

STRENX 100 XF

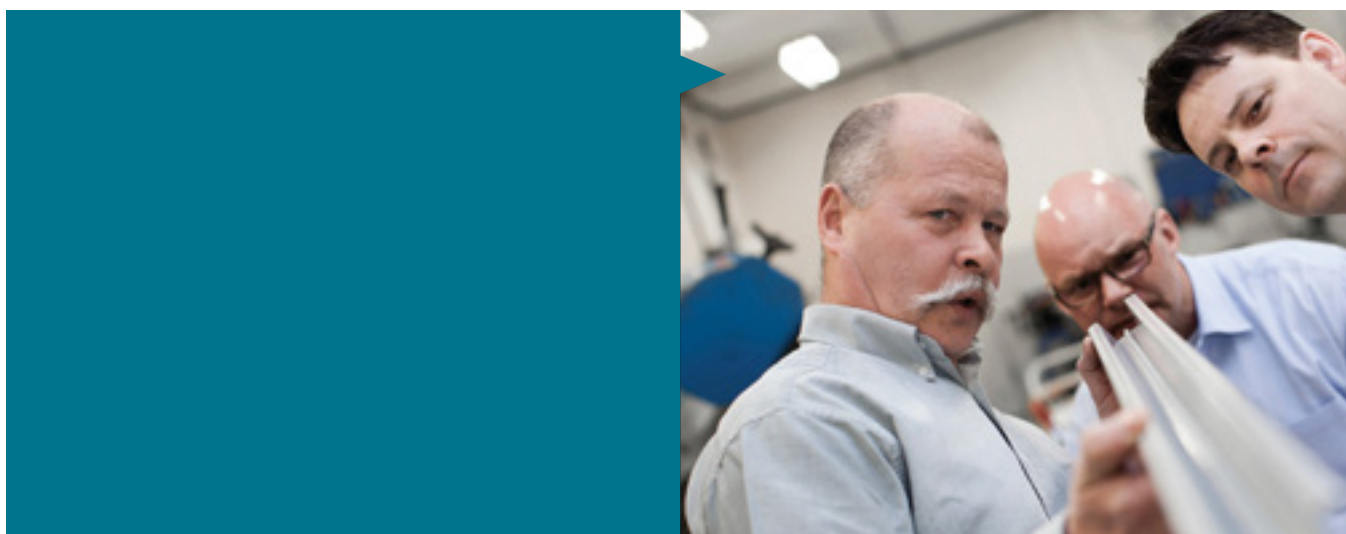

The UK English version of this document shall prevail in case of discrepancy. Download the latest version of this document at www.ssab.com
Hardox, Strenx, Docol, Dogal, Domex, Toolox, Laser, Armox, Ramor, GreenCoat are trademarks of SSAB Technology AB, Sweden